




SPEEL PRAHA s.r.o.  
 Beranových 130, 199 05 Praha 9, Czech Republic  
 www.speel.cz | email: info@speel.cz

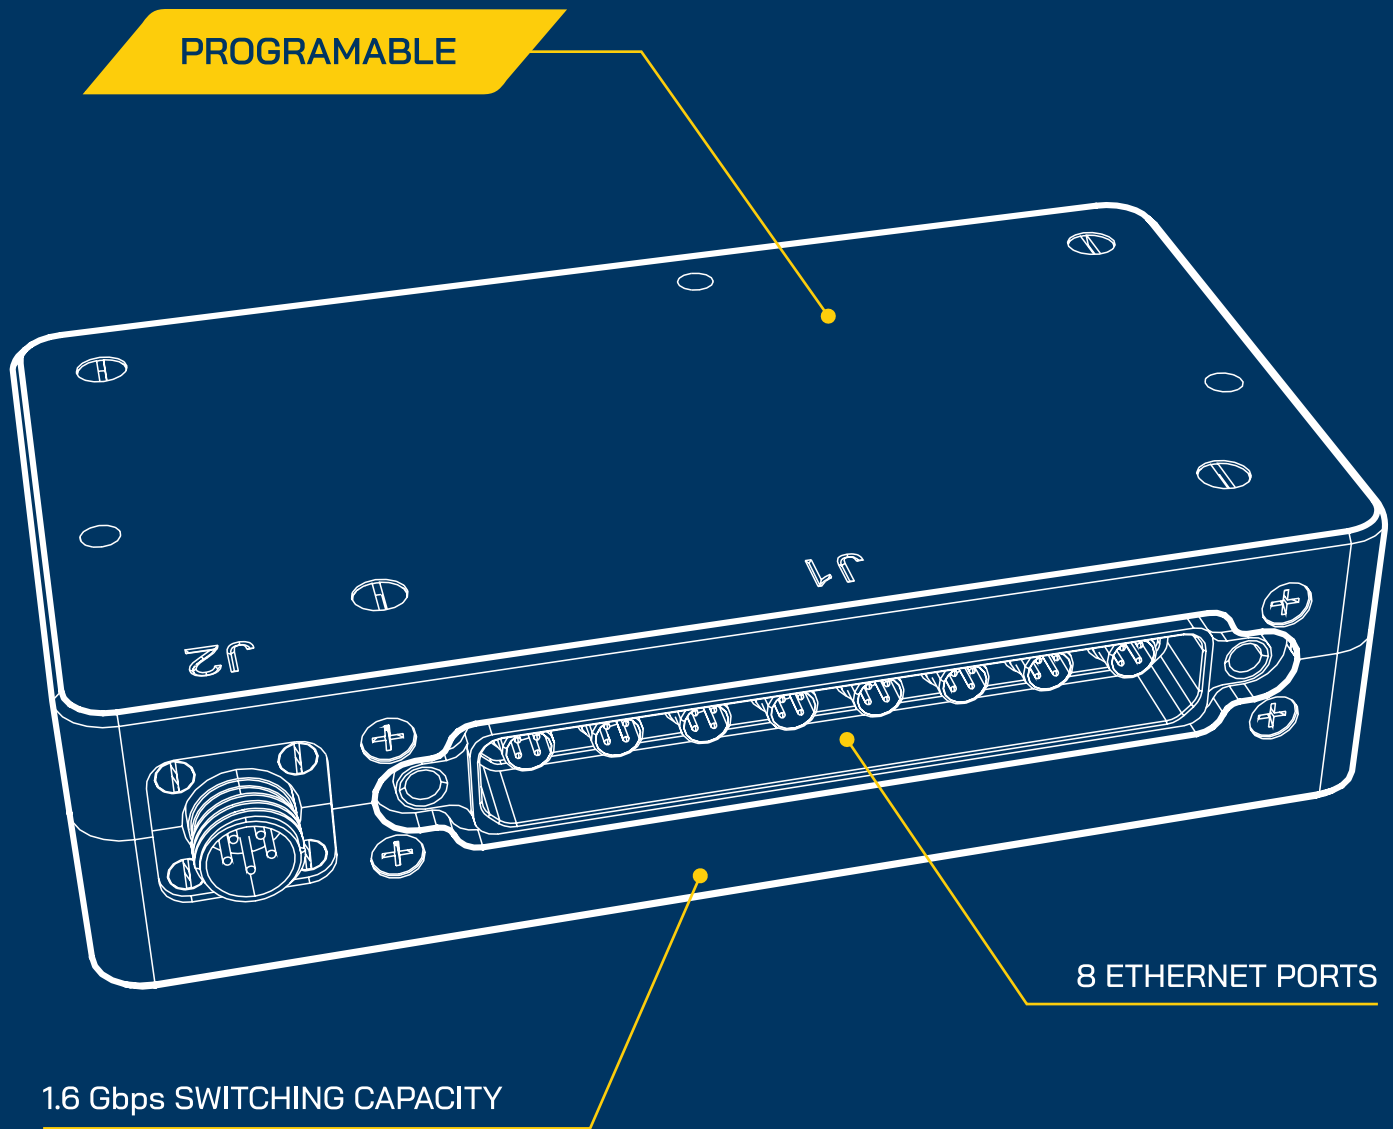

The Ethernet switch, ES-01, connects the elements of a computer network in a star topology and forwards network traffic only in the directions where it is needed. The switch features 8 network ports. The switch settings can be adjusted via RS232, for example, allowing the data flow to be restricted on individual network ports of the device.



ES-01
<b>Ethernet Switch</b>
The ES-01 unit is part of SPEEL's HEAD-UP DISPLAY system.

## Technical Specifications

Dimensions (w/h/l)	140x35x88 [mm]
Weight	< 0.5 kg
Power Supply	12 VDC to 33 VDC
Power Consumption	< 4 W
Ethernet Interfaces	8x Ethernet 100BASE-TX/10BASE-T 10 Mbps /100 Mbps
Length of the Metallic Link	< 100 m
Digital Interface	RS232
Environmental Compliance	MIL-STD-810F / MIL-STD-461E
Operating Temperature Range	-40°C to +60°C
MTBF	>10000 FH
Technical life	25 years

[ HEAD-UP DISPLAY ]

[ CVFDR ]

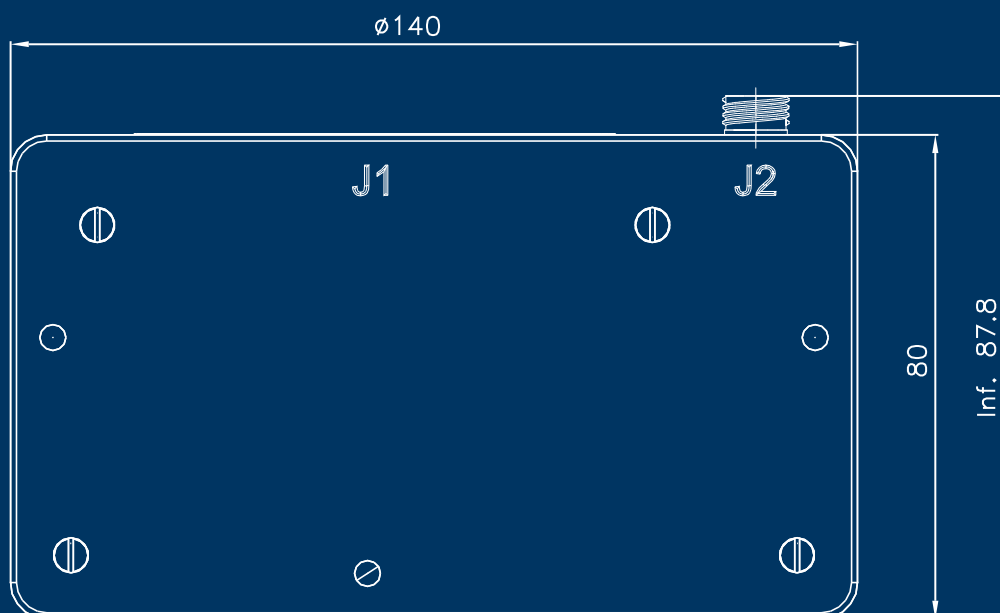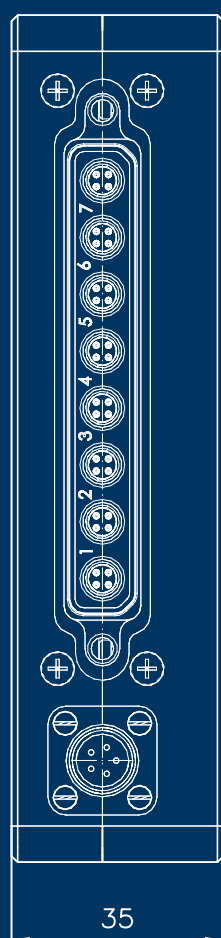

ES-01

**Ethernet Switch**

**SPEEL**  
P R A H A

SPEEL PRAHA s.r.o.  
Beranových 130,  
199 05 Praha 9,  
Czech Republic

www.speel.cz  
E-mail: info@speel.cz  
Tel.: +420 286 923 61

Information contained herein is the property of SPEEL and is subject to change without notice. ©2024 SPEEL PRAHA s.r.o.